


EN

UMD402U035

Reflex Sensor

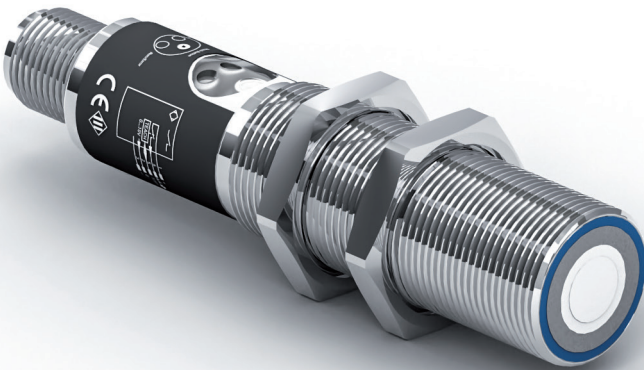

Interface Description

IO-Link UMD402U035

Vendor ID

Product	hex	dec	hex (Bytes)	dec (Bytes)
wenglor sensoric GmbH	0x0057	87	00 57	0 87

Device ID

Product	hex	dec	hex (Bytes)	dec (Bytes)
UMD402U035	0x160200	1442304	16 02 00	22 2 0

IO-Link Version: V 1.0
Data Storage: No
Blockparameter: No
Min Cycle Time: 2,3 ms
SIO-Mode: Yes
COM-Mode: COM2

Processdata UMD402U035 (Length: 16 Bit)

Name	Bit Offset	Length	Range
Output	0	1 Bit	0 = false 1 = true
Distance (1/10 mm)	4...15	12 Bit	

Parameter

Name	Index (hex)	Index (dec)	Subindex	R/W	Length	Default value	Range
Identification							
Direct Parameters 1.Vendor ID 1	0x0000	0	8	R	Uint8	00h	
Direct Parameters 1.Vendor ID 2	0x0000	0	9	R	Uint8	57h	
Direct Parameters 1.Device ID1	0x0000	0	10	R	Uint8	16h	
Direct Parameters 1.Device ID2	0x0000	0	11	R	Uint8	02h	
Direct Parameters 1.Device ID3	0x0000	0	12	R	Uint8	00h	
Parameter							
Sensor Parameters							
Device Reset	0x0001	1	1 (Bit 0)	R/W	Bool	0	0 = – 1 = Reset
Teach	0x0001	1	1 (Bit 1)	R/W	Bool	0	0 = – 1 = Teach-In
Teach-In Input	0x0001	1	1 (Bit 2)	R/W	Bool	0	0 = Enabled 1 = Locked
NC/NO	0x0001	1	1 (Bit 3)	R/W	Bool	0	0 = NO 1 = NC
Teach Mode	0x0001	1	1 (Bit 4)	R/W	Bool	0	0 = Foreground Teach-In 1 = Window Teach-In
Teach 2. Point	0x0001	1	1 (Bit 5)	R/W	Bool	0	0 = – 1 = Teach-In
Operating Mode	0x0001	1	3 (Bit 0...3)	R/W	Uint4	0	0 = Normal 1 = Synchron Mode Slave 2 = Synchron Mode Master 6 = Mute
Lock Control Panel	0x0001	1	3 (Bit 4)	R/W		0	0 = Enabled 1 = Locked
Sonic Cone	0x0001	1	3 (Bit 5...6)	R/W	Uint2	3	0 = Extra slim 1 = Slim 2 = Medium width 3 = Standard
Temperature Mode	0x0001	1	3 (Bit 7)	R/W	Bool	0	0 = Internal 1 = External
ext Temperature (High Byte)	0x0001	1	4	R/W	Uint8	00h	
ext Temperature (Low Byte)	0x0001	1	5	R/W	Uint8	00h	
Filter	0x0001	1	6 (Bit 0...3)	R/W	Uint4	0	0...7
Switch Point 1 (High Byte)	0x0001	1	7	R/W	Uint8	0Fh	
Switch Point 1 (Low Byte)	0x0001	1	8	R/W	Uint8	A0h	
Switch Point 2 (High Byte)	0x0001	1	9	R/W	Uint8	0Fh	
Switch Point 2 (Low Byte)	0x0001	1	10	R/W	Uint8	A0h	
Hysteresis (High Byte)	0x0001	1	11	R/W	Uint8	00h	
Hysteresis (Low Byte)	0x0001	1	12	R/W	Uint8	14h	