# Basler Cable USB 3.0, Micro B sl/A, S

USB 3.0 cable for data transmission with type A plug to Micro-B plug.






The cable is suitable for ace and ace 2 cameras.

Order Number	Cable Length
2200000620	1 m
2200000621	3 m

#### **Cable Drawing**

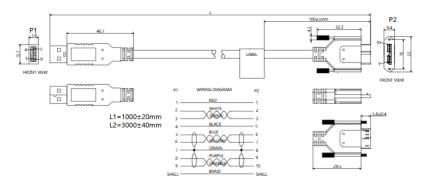

#### **Transfer Rates**

	2200000620 / 2200000621
USB 2.0	480 Mbps
USB 3.0	5 Gbps

## **Physical Specifications**

	2200000620 / 2200000621
Camera-Side Connector	Micro-B with screw lock
Host-Side Connector	Type A, USB-IF-compliant

Cable Diameter	5.7 mm max.
Minimum Bending Radius	28 mm, fixed installation
Maximum Bending Cycles	None (fixed installation only)
Suitable for Drag Chain Applications	No
Suitable for Robotics Applications	No

# **Electrical Specifications**

	2200000620 / 2200000621
Maximum Operating Voltage	See camera documentation for the power requirements of your camera.

## **Environmental Specifications**

	2200000620 / 2200000621
Operating Temperature	70 °C max., not moving

#### **General Information**

	2200000620 / 2200000621
Conformity	CE (includes RoHS)  Certificates for your cable C  For more information, see the Compliance C section of the Basler website.
Warranty	3 years

